


Precast Concrete Meter Pit - 12' x 6' x 7'



Advance Concrete Products Company info@advanceconcreteproducts.com 248-887-4173

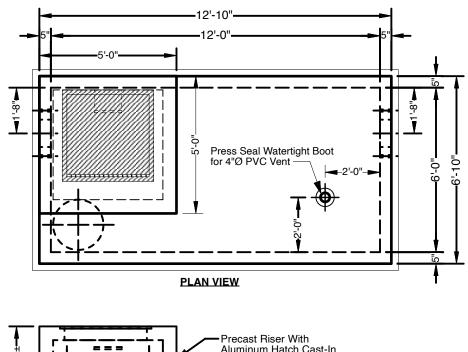

All Concrete Shall Have A 28 Day Compressive Strength Of 4500 PSI.

Reinforcing Steel Shall Comply With ASTM A615 Grade 60 Rebar. Bar Bending And Placement Shall Comply With The Latest ACI Standards.

Standard Structural Design Based On AASHTO HS 20 Wheel Loading with 12" to 24" Cover.

1" Ø CS-102 Butyl Rope Mastic Is Provided For Placement Between Top And Bottom Sections Of Vault.

This Drawing Shows a Sample. Meter Pits are Custom Fabricated to Meet Your Job Requirements.

Options Custom Opening Locations and Sizes Watertight Boots or Mechanical Seals Rectangular Precast Concrete Risers Aluminum Access Hatches Round Manhole Covers Grade Adjustment Rings

Approximate Weight Total: \pm 32,000 Lbs. Bottom Section: \pm 14,250 Lbs. Top Section: \pm 14,250 Lbs. Riser: \pm 3,500

