



Advance Concrete Products Company



(800) 824-8351 (248) 887-4173 Fax: (248) 887-2755

All Concrete Shall Have A 28 Day Compressive Strength Of 5000 PSI.


Reinforcing Steel Shall Comply With ACI 318-83 Grade 60 Rebar.

- Standard Structural Design Based On -Roof Load Of 60 psf Wind Load Of 27 psf Or 130 mph Fire Resistance Rating Of 1 1/2 Hours

Caulk Provided for Vertical Wall Joints

Steel Door(s) Manufactured By CECO Door Division: 1 3/4" Thick18 Gauge Steel Door In 16 Gauge Frame, Primed For Paint, With Keyed Dead-Bolt Lock.

- Available Options Single or Double Doors
Custom Opening Locations
Custom Size Vents
Exterior Exposed Limestone Aggregate Finish
Exterior Simulated Brick Finish

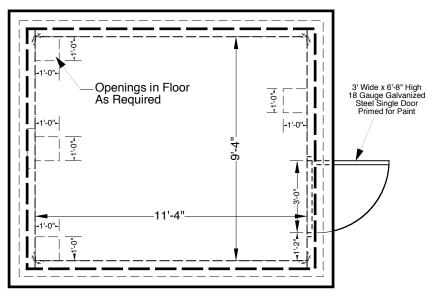

**PLAN VIEW** 

