



7'-2" x 6'-6" x 8" Thick Transformer DTE Pad 1-56-102B 3-6-4



Advance Concrete Products Company

(800) 824-8351 (248) 887-4173 Fax: (248) 887-2755

3-6-4 Pad for Three-Phase Non-Switching and Three-Phase ISO Pad Transformers 750 to 1500 kVA.

All Concrete Shall Have A 28 Day Compressive Strength Of 4500 Psi.

#4 Rebar @ 12" O.C. Max. Spacing, Each Way
3" Concrete Cover on Bottom
2" Concrete Cover on Sides


(1) Extra #4 Rebar x 6'-2" @ Each Short Edge Of Opening
(1) Extra #4 Rebar x 6'-10" @ Each Long Edge Of Opening

Approx. Weight: 4,265 lbs. 1.05 yds.
Diagonal Dimension: 9'-8 1/8"


1/2" Tooled Chamfer on Top Edges

Mag Float Finish on Top Surface

(3) Conac Galv. Steel Recessed Lift Inserts on Surface

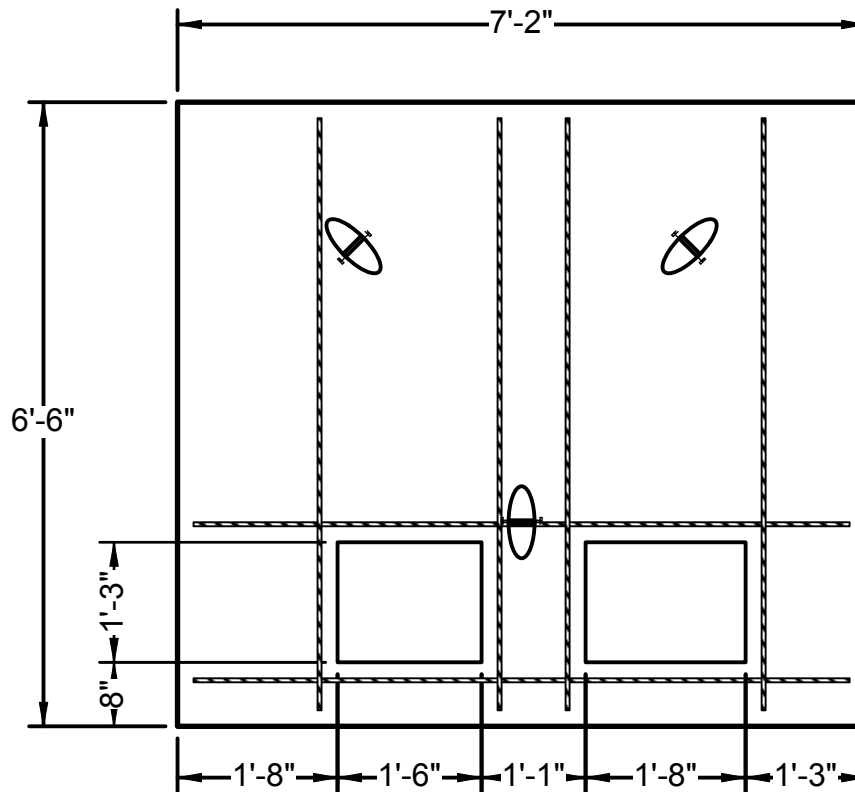

PLAN VIEW

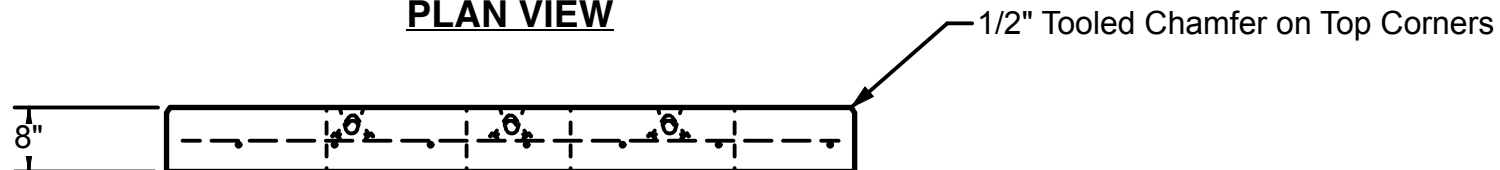

SIDE VIEW

Reviewed and Approved by:

Date