


# 4' x 4' x 5' Aircraft Loading Handhole



Advance Concrete Products Company

(800) 824-8351 (248) 887-4173 Fax: (248) 887-2755

18" x 18" Knockout  
1 Per Wall, 4 Total

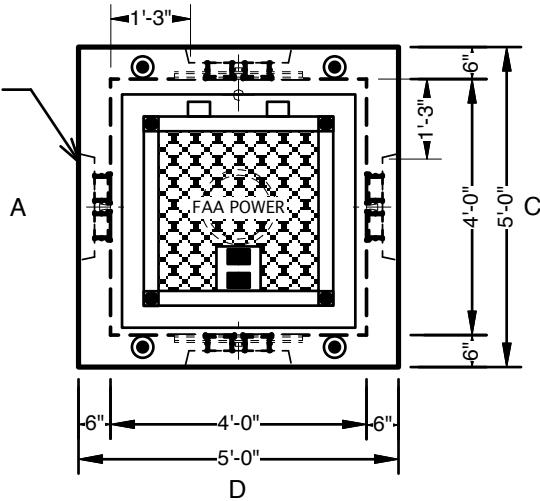

**PLAN VIEW**

All Concrete Shall Have A 28 Day Compressive Strength Of 6000 Psi

Reinforcing Steel Shall Comply With ASTM A615 Grade 60 Rebar  
Bar Bending And Placement Shall Comply With The Latest ACI Standards

Aircraft Rated Structural Design

Please contact us for reinforcement information

Meadow-Burke  
2-Ton Lift Insert  
("dogbone" Typ.4  
In Roof)

Aircraft Loading Frame and Cover with Spring Assist,  
Lettered "FAA POWER" (Alternate Lettering Available)

24" Unistrut  
P-3000 (Typ. 2  
Opposite Walls)

18" x 18" Knockout  
1 Per Wall, with  
(4) Terminators for  
Ø4" PVC Conduit

Ø12" x 3" Deep Sump  
No Drain

**View from Outside of Wall D**

Ø1" Butyl Rope Mastic  
In Tongue-in-Groove Joint

Ø1" PVC Cast-in Floor  
for Ground Rod

Recessed Pocket  
Pulling Iron (Typ. 1  
Each Corner)

**View from Outside of Wall C**